

TOP ABSOLUTE FILTERCARTRIDGES

UK - FILTERINFORMATIE

Specially to supply the demand for industrial greater requirements for product purity. Top absolute filtercartridges are made of 100% high purity polypropylene micro fibers, blown on the center core, which eliminates the requirements of binders or additives. These Top absolute filters DOE, SOE are equipped with FPM O ring and are silicone free.

NL- Filterinformatie

Speciaal om tegemoet te kunnen komen aan de vraag naar meer zuivere producten. Top absoluut filtercartridges zijn gemaakt van 100% zuiver polypropylene micro fibers, geblazen op de middenkern, waarmee toevoeging van additieven en lijmen wordt voorkomen. Deze Top absolute filters, Dubbel open end, of Single open end zijn voorzien van FPM O ring en siliconen vrij.





Applicaties


- Pharmaceutical Extracts
- Electronic Pure water
- Foto resins, acids, bases
- Film and Photo resins, lacquers developer dispersion
- Food and Beverages Mineral water, beer, wine, edible oil
- Cosmetics Mouth wash, perfume, Lotion, Shampoo
- Automotive E coats
- Surface finishing Coolants, plating liquids
- Others Chemicals, papercoatings, printing inks, solvents

Toepassingen

- Pharmaceutical Diverse oplossingen
- Electronica Zuiver water
- Foto resins Zuren, basen,
- Film en Foto Resins, lakken, ontwikkelaar
- Voedsel en drank Mineraal water, bier, wijn, eetbare oliën
- Cosmetics Mondwater, parfum, lotion, shampoo
- Automotive Electro coating
- Poetsmiddelen Poets en schuurmiddelen
- Andere Chemische middelen, papiercoating, printing inkt, oplosmiddelen

Technische eigenschappen

Aansluitingen	DOE, SOE, met FPM o ring
Lengtes	5-10-20-30-40"
Selectiviteit	0,5 μ - 120 μ micron
Temperatuur	maximaa80 Celcius continu
Max delta P	4,0 bar bij 25 Celcius

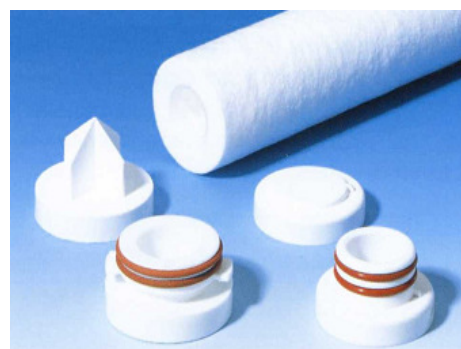

TOP Absolute Filter Cartridges

LOFTOP absolute filter cartridges are available in a wide range of types for use in many different applications:

Length:

05" (127 mm) 30" (762 mm)
10" (254 mm) 40" (1016 mm)
20" (508 mm)

Diameter:

Outer Diameter: 64 mm
Inner Diameter: 27 mm



Sealing Materials:

Version G: Polypropylene
Version 2, 3+4: Silicone rubber (standard), Viton

Choice of End Caps/Adapters:

TOP absolute filter cartridges come standard as DOE (double open end) versions with polypropylene flat gaskets (G). In addition they are available with common end caps/adapter with O-rings for Eaton cartridge housings and other systems. All end caps/adapters are made of polypropylene (FDA-conform).



Optional Versions:

For operating temperatures up to 100°C **TOP** filter cartridges can be equipped with a stainless steel core.

Packaging Units:	
Length	05" = 60 pcs.
	10" = 30 pcs.
	20" = 15 pcs.
	30" = 15 pcs.
	40" = 15 pcs.
Box Sizes:	
Length	05" = 33 x 20 x 53 cm
	10" = 33 x 20 x 53 cm
	20" = 33 x 20 x 53 cm
	30" = 33 x 20 x 78 cm
	40" = 33 x 20 x 104 cm

Product Code: LT - 10 - 30 - A - G


LOFTOP

Length (")
5 - 10 - 20 - 30 - 40

Filter Fineness (µm)
0.5 - 1 - 3 - 5 - 10 - 20 - 30 - 50 - 70 - 90 - 120

Absolute Efficiency β-ratio 5000

End Caps/Adapters:
(not valid for DOE)
G (DOE foamed flat gaskets polypropylene)
2 (SOE 222 O-rings, spear) 2 V = with Viton O-rings
3 (SOE 226 O-rings, bayonet/spear) 3 V = with Viton O-rings
4 (SOE 222 O-rings/flat) 4 V = with Viton O-rings

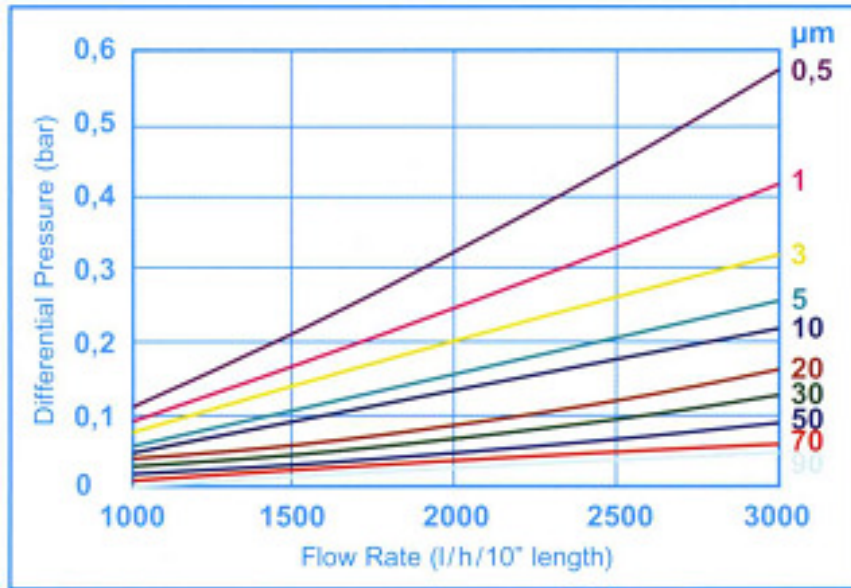

Mogelijke flow Liter / uur bij schone filterkaars 10'

	Dirt Holding Capacity (g/10")
LT-10-0,5-A	66
LT-10-1-A	68
LT-10-3-A	70
LT-10-5-A	70
LT-10-10-A	70
LT-10-20-A	70
LT-10-30-A	70
LT-10-50-A	70
LT-10-70-A	94
LT-10-90-A	360
LT-10-120-A	360

Vuil – opname capaciteit gram per 10'' filterkaars