



HOLLAND FILTER PIPE LINE STRAINERS


Protecting your Pumps, Filters, Nozzles, Flow-meters, Valves, Heat exchangers, Condensers, Oil burners and Boilers from Pipeline Debris

For over 75 years, Strainers have earned the confidence of thousands of users. They have led the way with designs that meet ever-growing and rigorous demands of process and manufacturing industries, utilities and municipalities. Holland Filter has strainers for almost any fluid and flow condition. There is a broad and complete range of strainers to meet virtually any requirement.

Quality control stamps

- ASME Section VIII
- AD 2000 Merkblätter
- ISO 9001-2000

Bescherming voor de pompen, filters, nozzles, flowmeters, kleppen, warmtewisselaars en boilers tegen leidingcorrosie, leidingverontreiniging.

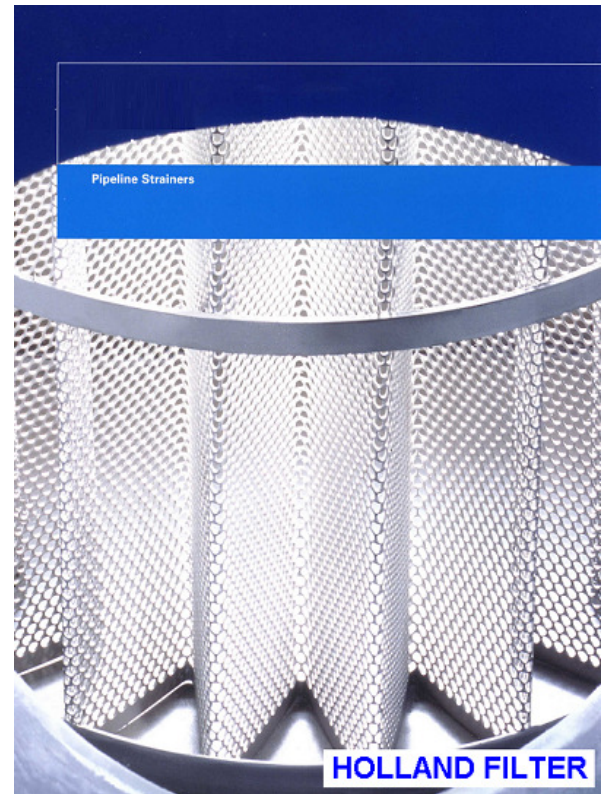

Al meer dan 75 jaar hebben Strainers het vertrouwen van duizenden gebruikers. Zij nemen het voortouw met ontwerpen die steeds moeten voldoen aan de groeiende en strengere eisen van de proces- en verwerkende industrie, nutsbedrijven en gemeenten. Holland Filter heeft strainers voor bijna elke vloeistof en processituatie. De strainers bevatten een breed en compleet gamma, die vrijwel aan elke eis kunnen voldoen.

Kwaliteitscontrole



- ASME sectie VIII
- AD 2000 Merkblätter
- ISO 9001-2000 hierbij is een compleet strainer programma beschikbaar welke aan vrijwel alle eisen kan voldoen.



MODEL ALL PLASTIC SIMPLEX basket strainer

DN15 to DN200 1/2" to 8" PVC- CPVC - Polypropylene

- Threaded and lugged cover – Fast access to basket chamber
- Large capacity basket – Longer service time, less cleaning
- Corrosion resistant body – Compatible with aggressive liquids
- Threaded drain – Basket chamber easily emptied

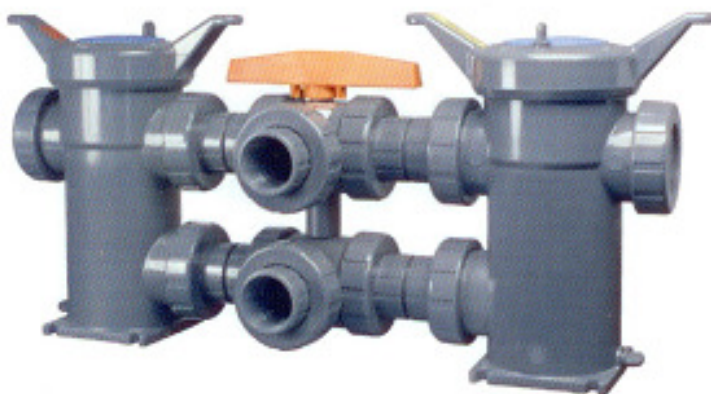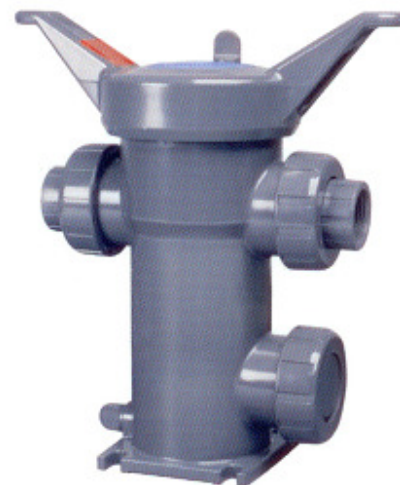

Selection Chart

Size	Body Material	End Connections	Seals	Rating
DN 25 to 100	PVC or CPVC	Threaded, socket or flanged		
DN 25 to 50	PPL	Threaded or flanged	Viton®	10.35 bar @ 21°C
DN 150 to 200	PVC	Flanged		

Selection Chart

Size	Body Material	End Connections	Seals	Rating
DN 15 to 100	PVC	Socket	Viton®	10.35 bar @ 21°C
		Threaded		
		Flanged		
	CPVC	Socket		
		Threaded		
		Flanged		