



ECOCART EKF "E" Singel Filterhuis informatie

Information housing

Ecocart EKF "E" series cartridge filters are made for double open end DOE cartridges. Manufactured in SS304, they consist of a head and a sump, connected by a center rod with a cap nut. Head sump, head and cap nut are sealed with flat ring gaskets.

The sump is equipped with a bottom drain. An optional bracket is available for mounting the filter to the wall.


Informatie behuizing

Ecocart EKF "E"-serie cartridge filters zijn gemaakt voor een dubbele open einde DOE cartridges. Vervaardigd in RVS 304, ze bestaan uit een filterkop en een filterhuis, verbonden door een centrale staaf met een dopmoer. Deze zijn afgedicht met platte ring pakkingen.

Het filterhuis is voorzien van een bodemdrain. Een optionele beugel is verkrijgbaar voor montage van het filter aan de wand.



Series EKF "E"

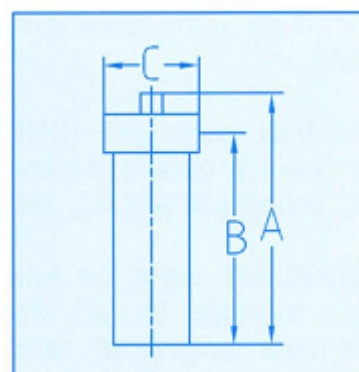

Technical Data:

ECOCART Type	EKF-109-BE-3/4 EKF-109-BE-1	EKF-120-BE-3/4 EKF-120-BE-1
Max. Flow Rate (m ³ /h)	2.4	4.8
Max. Operating Conditions (bar/°C)	17/121	17/121
Housing Dimensions (mm)		
	A	337
	B	317
	C	114
Volume (l)	1.5	2.97
Weight (kg)	3.5	4.5
Inlet/Outlet (BSP female)	3/4" or 1"	3/4" or 1"
Drain (NPT female)	1/8"	1/8"
Length of Filter Cartridge	9 3/4" = 248 mm	20" = 508 mm
No. of Filter Cartridges	1	1
Max. Cartridge Outside Diameter	72 mm	72 mm



ECOCART EKF "BE" Singel Filterhuis informatie

Information housing

Ecocart EKF "BE" series cartridge filters are made for double open end DOE cartridges. Manufactured in SS304, they consist of a head and a sump, connected by a center rod with a cap nut. Head sump, head and cap nut are sealed with flat ring gaskets.


The sump is equipped with a bottom drain. An optional bracket is available for mounting the filter to the wall.

Informatie behuizing

Ecocart EKF "BE"-serie cartridge filters zijn gemaakt voor een dubbele open einde DOE cartridges. Vervaardigd in RVS 304, ze bestaan uit een filterkop en een filterhuis, verbonden door een centrale staaf met een dopmoer. Deze zijn afgedicht met platte ring pakkingen. Het filterhuis is voorzien van een bodemdrain. Een optionele beugel is verkrijgbaar voor montage van het filter aan de wand.



Series EKF "BE"

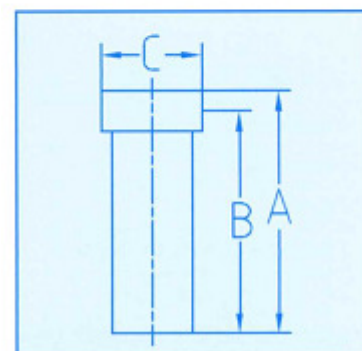

Technical Data:

ECOCART Type	EKF-109-BE-3/4 EKF-109-BE-1	EKF-120-BE-3/4 EKF-120-BE-1
Max. Flow Rate (m ³ /h)	2.4	4.8
Max. Operating Conditions (bar/°C)	17/121	17/121
Housing Dimensions (mm)		
	A	337
	B	317
	C	114
Volume (l)	1.5	2.97
Weight (kg)	3.5	4.5
Inlet/Outlet (BSP female)	3/4" or 1"	3/4" or 1"
Drain (NPT female)	1/8"	1/8"
Length of Filter Cartridge	9 3/4" = 248 mm	20" = 508 mm
No. of Filter Cartridges	1	1
Max. Cartridge Outside Diameter	72 mm	72 mm